




Hydraulic
Tools

To Indent or Compress in Copper or Aluminum Lugs	73
To Compress in Copper or Aluminum Lugs	74
Hollow Punch	77
Dies	78



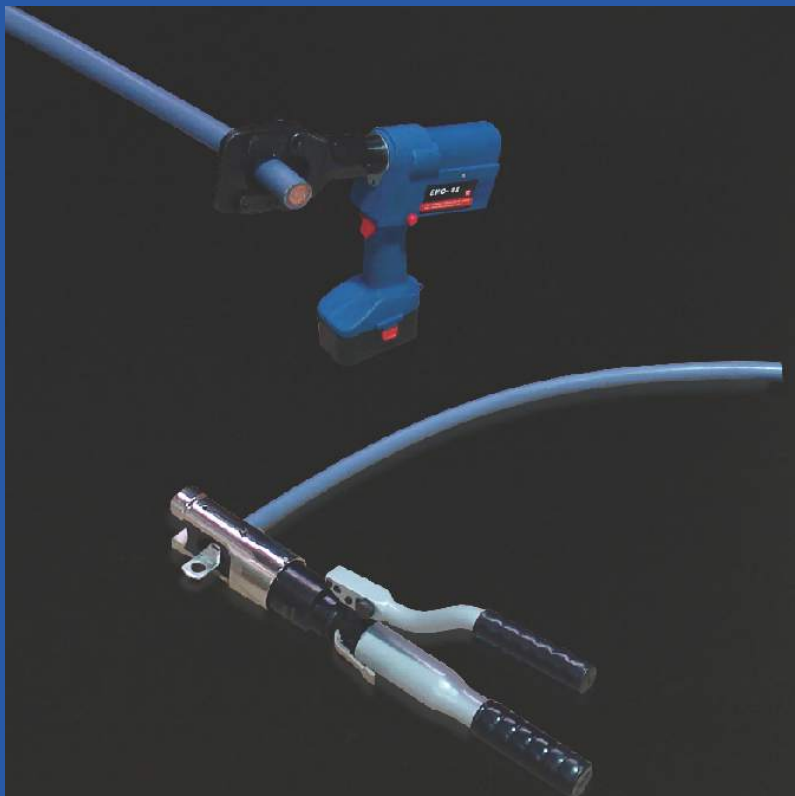


HYDRAULIC TOOLS

To Ident or Compress in Copper or Aluminum Terminals





THS-150



FUNCTION		RANGE (mm ²)	CHARACTERISTICS
	COPPER COMPRESSION 	10 - 150	<ul style="list-style-type: none"> Strength = 6T Isolates Sleeves Agile and light With Box and Dies Included
	ALUMINUM COMPRESSION 	6 - 95	
LENGTH (mm)	WEIGHT (kg)	STEP (mm)	MODEL
370	1,360	12 a 6	THS-150





HP-240 C




FUNCTION		RANGE (mm ²)	CHARACTERISTICS
	COPPER COMPRESSION 	10 - 240	<ul style="list-style-type: none"> Strength = 12T Type «C» Head 180° Turn Opening 55mm Shutoff Valve Box & Dies Included
	ALUMINUM COMPRESSION 	6 - 185	
LENGTH (mm)	WEIGHT (kg)	STEP (mm)	MODELO
480	3,600	9	HP-240 C






CYO-510B

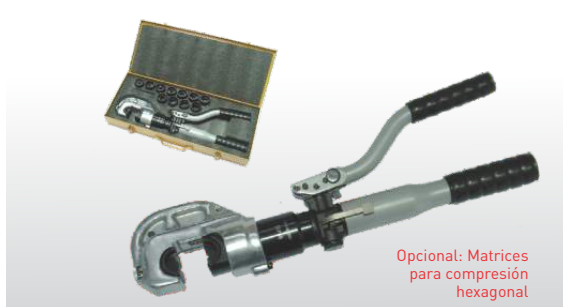


FUNCTION		RANGE (mm ²)	CHARACTERISTICS
	COPPER COMPRESSION 	50 - 400	<ul style="list-style-type: none"> Strength = 13T Type «C» Head 180° Turn Opening 38mm Double Piston (quick reach) Shutoff Valve Completely Isolated Box & Dies Included
	ALUMINUM COMPRESSION 	35 - 240	
LENGTH (mm)	WEIGHT (kg)	STEP (mm)	MODELO
600	7,800	9	CYO-510B

HT-400



FUNCTION		RANGE (mm ²)	CHARACTERISTICS
	CONECTOR TIPO "C"	4 - 185	<ul style="list-style-type: none"> Strength = 13T Type «C» Head 180° Turn Opening 42mm Double Piston (quick reach) Shutoff Valve Isolates Sleeves Box & Dies for "C" Connectors Included
	COPPER COMPRESSION 	50 - 400	
	ALUMINUM COMPRESSION 	35 - 240	
LENGTH (mm)	WEIGHT (kg)	STEP (mm)	MODEL
560	7,500	9	HT-400

KDG-200

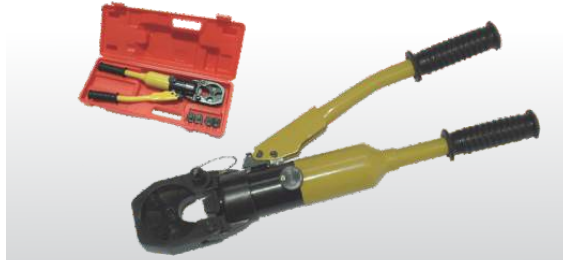



FUNCTION		RANGE (mm ²)	CHARACTERISTICS
	COPPER COMPRESSION 	16 - 185	<ul style="list-style-type: none"> Strength = 16T «REVOLVER» Type Head Changeable Punches Isolates Sleeves Box & Dies Included
	ALUMINUM COMPRESSION 	25 - 120	
LENGTH (mm)	WEIGHT (kg)	STEP (mm)	MODEL
510	4,900	12	KDG-200

HYDRAULIC TOOLS

To Compress in Copper or Aluminum Terminals and for Cutting


FYQ-400



FUNCTION		RANGE (mm ²)	CHARACTERISTICS
	COPPER COMPRESSION	16 - 400	<ul style="list-style-type: none"> Strength = 22T Remote Pump and Head Length of Hose 1200mm Double Piston Pump (quick reach) Box & Dies Included
	ALUMINUM COMPRESSION	25 - 240	
LENGTH (mm)	WEIGHT (kg)	STEP (mm)	MODEL
480	14,500	9	FYQ-400



THC-42



FUNCTION		RANGE (mm ²)	CHARACTERISTICS
	CUT	< \varnothing 45	<ul style="list-style-type: none"> Strength = 6T Head with Opening 360° Turn Double Piston (quick reach) Shutoff Valve Isolated Sleeves Box Included
LENGTH (mm)	WEIGHT (kg)	DETAIL	MODEL
560	5,000	Cu - AL	THC-42



CO-400B



FUNCTION		RANGE (mm ²)	CHARACTERISTICS
	COPPER COMPRESSION	16 - 400	<ul style="list-style-type: none"> Strength = 20T Head with Opening 360° Turn For Pump: CHP-390 / CHP-700 / CFP-800 Box & Dies Included
	ALUMINUM COMPRESSION	25 - 240	
LENGTH (mm)	WEIGHT (kg)	STEP (mm)	MODEL
240	6,400	14	CO-400B



FYQ-630A



FUNCTION		RANGE (mm ²)	CHARACTERISTICS
	COPPER COMPRESSION	150 - 630	<ul style="list-style-type: none"> Strength = 30T Head with Opening 360° turn For Pump: CHP-700 / CFP-800 Box & Dies Included
	ALUMINUM COMPRESSION	120 - 400	
LENGTH (mm)	WEIGHT (kg)	STEP (mm)	MODEL
370	28,000	20	FYQ-630A

FHT-400U





FUNCTION		RANGE (mm ²)	CHARACTERISTICS
	COPPER COMPRESSION	16 - 400	<ul style="list-style-type: none"> Strength = 13T «MILANO» Type Head 360° Turn 20mm Opening For Pump: CHP-390 / CHP-700 / CFP-800 Box & Dies Included
	ALUMINUM COMPRESSION	25 - 240	
LENGTH (mm)	WEIGHT (kg)	STEP (mm)	MODEL
300	3,650	9	FHT-400U

HYDRAULIC TOOLS

To Compress in Copper or Aluminum Terminals and for Cutting

SHP-510H



FUNCTION	RANGE (mm ²)	CHARACTERISTICS	
 COPPER COMPRESSION	50 a 400	<ul style="list-style-type: none"> Strength = 13T «C» Type Head 180° Turn 38mm Opening For Pump: CHP-390 / CHP-700 / CFP-800 Box & Dies Included 	
 ALUMINUM COMPRESSION	35 a 240		
LENGTH (mm)	WEIGHT (kg)	STEP (mm)	MODEL
370	5,700	9	SHP-510H


CC-50B




FUNCTION	RANGE (mm ²)	CHARACTERISTICS	
 CORTE	< ø 45mm	<ul style="list-style-type: none"> Strength = 11T Scissor head For Pump: CHP-390 / CFP-800 Box Included 	
LENGTH (mm)	WEIGHT (kg)	DETAIL	MODEL
340	6,200	Cu - Al	CC-50B


FHC-42



FUNCTION	RANGE	CHARACTERISTICS	
 CORTE	< ø 45mm	<ul style="list-style-type: none"> Strength = 6T Head with Opening For Pump: CHP-390 / CFP-800 Box Included 	
LENGTH (mm)	WEIGHT (kg)	DETAIL	MODEL
355	4,200	Cu - Al	FHC-42

CPC-100B

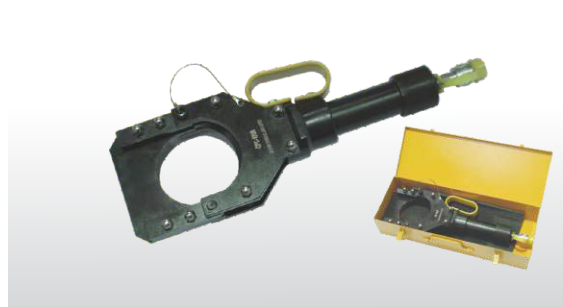

FUNCTION	RANGE (mm ²)	CHARACTERISTICS	
 CUT	< ø 75	<ul style="list-style-type: none"> Strength = 7,5T Head with Opening For Pump: CHP-390 / CFP-800 Box Included 	
LENGTH (mm)	WEIGHT (kg)	DETAIL	MODEL
515	8,700	Cu - Al	CPC-100B

CHP-390



FUNCTION	CAPACITY	CHARACTERISTICS	
MANUALLY OPERATED LEVER PUMP	700 Kg/cm ² 480 cc	<ul style="list-style-type: none"> Double Piston (quick reach) Hose Length 1200mm Box Included 	
LENGTH (mm)	WEIGHT (kg)	DETAIL	MODEL
400	4,600	For Heads	CHP-390

HYDRAULIC TOOLS


To Compress in Copper or Aluminum Terminals and for Cutting

CHP-700



FUNCTION		CAPACITY	CHARACTERISTICS
MANUALLY OPERATED LEVER PUMP		700 Kg/cm ² 1800 cc	<ul style="list-style-type: none"> Double Piston (quick reach) Hose Length 2000mm Box Included
LENGTH (mm)	WEIGHT (kg)	DETAIL	MODEL
510	10,700	For Heads	CHP-700

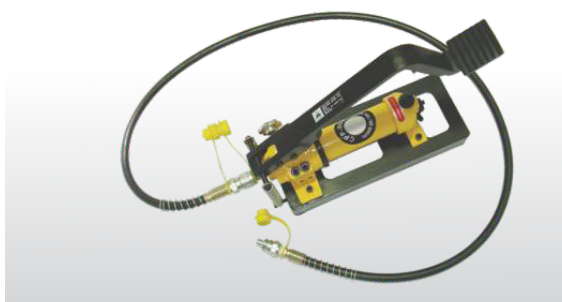

CFP-800



FUNCTION		CAPACITY	CHARACTERISTICS
MANUALLY OPERATED PUMP WITH PEDALS		700 Kg/cm ² 850 cc	<ul style="list-style-type: none"> Double Piston (quick reach) Hose Length 2100mm Box Included
LENGTH (mm)	WEIGHT (kg)	DETAIL	MODEL
450	9,000	For Heads	CFP-800


EHT-400



FUNCTION		RANGE (mm ²)	CHARACTERISTICS
	COPPER COMPRESSION	16 a 400	<ul style="list-style-type: none"> Strength = 13T «C» Type Head 360° Turn 42mm Opening Double Piston (quick reach) Shutoff Valve Motor Shutoff Completely Isolated Includes Batteries, Chargers, Dies and Box
	ALUMINUM COMPRESSION	25 a 240	
DIM. (mm)	WEIGHT (kg)	STEP (mm)	MODEL
470 x 470 x 190	6,800	9	EHT-400

EHC-45



FUNCTION		RANGE (mm ²)	CHARACTERISTICS
	CUT	< ø 45	<ul style="list-style-type: none"> Strength = 6T 360° Turn Double Piston (quick reach) Shutoff Valve Motor Shutoff Completely Isolated Includes Batteries, Chargers and Box
DIM. (mm)	WEIGHT (kg)	DETAIL	MODEL
470 x 470 x 190	5,300	Cu - Al	EHC-45

Hollow Punch

TPA-8



FUNCTION		CAPACITY	CHARACTERISTICS
HOLLOW PUNCH		ø 22,00	<ul style="list-style-type: none"> Strength = 6T Head with 360° Turn Double Piston (quick reach) Does not leaves tongue Box and Dies Included
		ø 28,00	
		ø 34,00	
		ø 43,00	
		ø 49,00	
		ø 60,50	
LENGTH (mm)	WEIGHT (kg)	DETAIL	MODEL
310	6,500	Thick < 2 mm	TPA-8

SYK-15



FUNCTION		CAPACITY	CHARACTERISTICS
HOLLOW PUNCH		ø 22,00	<ul style="list-style-type: none"> Strength = 15T Pump + Head with 360° Turn Hose Length 1200mm Does not leaves tongue Box and Dies Included
		ø 28,00	
		ø 34,00	
		ø 43,00	
		ø 49,00	
		ø 60,50	
		ø 76,00	
		ø 89,00	
		ø 100,00	
		ø 115,50	
LENGTH (mm)	WEIGHT (kg)	DETAIL	MODEL
450	16,500	Thick < 3 mm	SYK-15

Dies



CODE	FOR TOOL	SECTION [mm²]
M THS-150 10/16	THS-150	10-16
M THS-150 25/35		25-35
M THS-150 50/70		50-70
M THS-150 95/120		95-120
M THS-150 /150		150




CODE	FOR TOOL	SECTION [mm²]
M CYO-510B 16	CYO-510 B HT-400 HT-400U FHT-400U SHP-510H EHT-400	16
M CYO-510B 25		25
M CYO-510B 35		35
M CYO-510B 50		50
M CYO-510B 70		70
M CYO-510B 95		95
M CYO-510B 120		120
M CYO-510B 150		150
M CYO-510B 185		185
M CYO-510B 240		240
M CYO-510B 300		300
M CYO-510B 400		400



CODE	FOR TOOL	SECTION [mm²]
M FYQ-400 16	FYQ-400 CO-400B	16
M FYQ-400 25		25
M FYQ-400 35		35
M FYQ-400 50		50
M FYQ-400 70		70
M FYQ-400 95		95
M FYQ-400 120		120
M FYQ-400 150		150
M FYQ-400 185		185
M FYQ-400 240		240
M FYQ-400 300		300
M FYQ-400 400		400



CODE	FOR TOOL	SECTION [mm²]
M "C" CCT-60	CONNECTORS "C"	60
M "C" CCT-76		76
M "C" CCT-98	CYO-510 B	98
M "C" CCT-122	HT-400 HT-400U	122
M "C" CCT-154	FHT-400U SHP-510H	154
M CCT-190/240		190/240
M "C" CCT-288	EHT-400	288

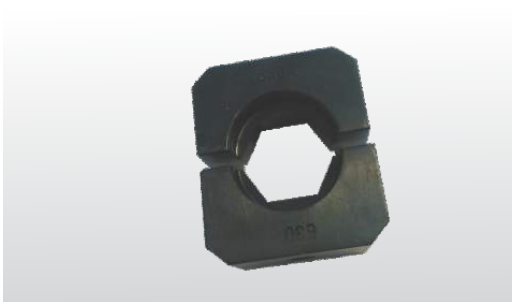

CODE	FOR TOOL	SECTION [mm²]
M FYQ-630A 120	FYQ-630A	120
M FYQ-630A 150		150
M FYQ-630A 185		185
M FYQ-630A 240		240
M FYQ-630A 300		300
M FYQ-630A 400		400
M FYQ-630A 500		500
M FYQ-630A 630		630